

AK

RANGER

* Make sure the handset is in idle mode.

ATTN

ND-20741
MAY, 1980

SAMPLE LED INDICATIONS

SAMPLE LCD INDICATIONS

4.5 Clock/Calendar Setting

* The clock/calendar can be set from the Attendant Key Telephone (only Tel. Port No. 10 or 11).

NOTE: If no key entry is made in 10 seconds, the clock setting mode will be automatically cancelled.



EXAMPLE: Monday, February, 9, 1988,
10:15 A.M

- (1) Depress FNC key.
- (2) Dial 9 and #.

- Move the cursor to the desired position by using # or * button.
(Cursor is indicated by blinking character.)

- (3) Hour Setting : Dial 1, 0
- (4) Minute Setting : Dial 1, 5
- (5) AM/PM Setting : Depress RECALL key.
- (6) Depress HOLD key for setting the Calendar.
- (7) Month Setting : Dial 0, 2.
- (8) Day Setting : Dial 0, 9.

FNC LED lights.

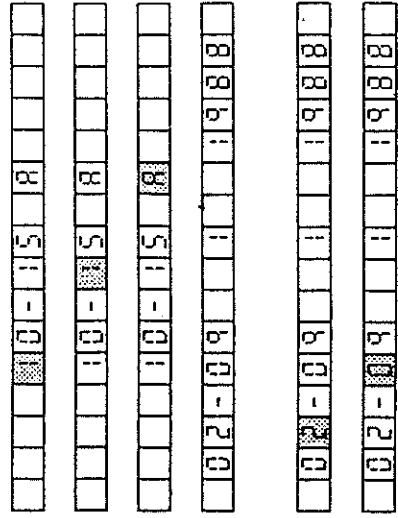

SAMPLE LED INDICATIONS

(9) Day of Week Setting : Dial 1
(See Note)

(10) Year Setting : Dial 1, 9, 8, 8

(11) Depress FNC key.

NOTE: The day of the week is shown by number as follows.

- 0 : SUN
- 1 : MON
- 2 : TUE
- 3 : WED
- 4 : THU
- 5 : FRI
- 6 : SAT

SAMPLE LCD INDICATIONS

2-09 11 1988

2-09 11 1988

2-09 10-15P

FNC LED goes off.